



MCM CDSM Alarm Panel

- ✓ **Panel Dialler wiring**
- ✓ **Panel Dialler programming**

Background:

The PM45 & PM1048-3G (v3) communicator now has a terminal block for the connection of the female 611 fly lead (supplied). If the Alarm Panel also has a terminal block for PSTN connection, we recommend you use your own cable between the Alarm Panel dialler and PM45 & PM1048-3G (v3).


This type of installation negates the use of the female 611 fly lead, decreasing your installation time. For four (4), six (6) and eight (8) pin RJ connectors, please refer to manufactures wiring diagram.

There are four minimum requirements from the Alarm panel for successful communication:

- 1) Must have an eight (8) digit primary phone. E.g. 12345678 or 55555555.
- 2) A four (4) digit account number.
- 3) Must be Contact ID format.
- 4) Must be set for tone (DTMF) dialling.
- 5) Optional is open / close reporting, must be enabled for Pocket Secure App.

Dial LED, located adjacent to the dial relays, will light when the dialler is in its reporting sequence and will extinguish when reporting is completed.

Dialler Lead wiring between Permaconn and MCM CDSM Alarm Panel:

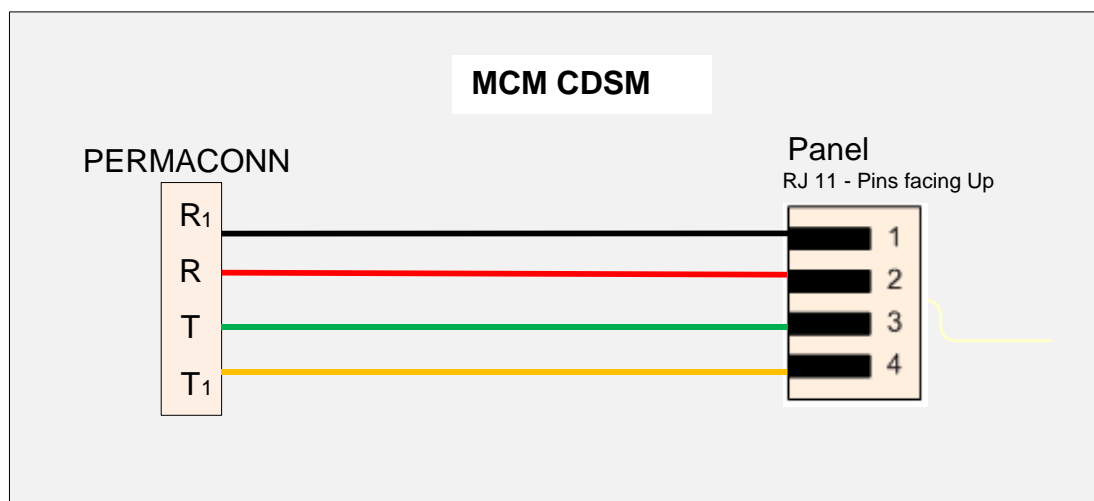

Notes: The dialler will not dial if the account number (Function 60) or phone number 1 (Function 64) is not programmed or the account number is set to 0000.

Programming the MCM CDSM Alarm Panel for dialler operation:

| Description | Location | Default |
|-------------------|---------------|-------------------------------|
| Message format | 67 | 4 = Contact ID (Default is 4) |
| Account 1 | 60 | Nil (4 digits) |
| Phone number 1 | 64 Phone 1 | Nil (Max. 15 digits) |
| Open/Close Report | 63 | 1 = Enabled |
| Dialling Format | 66 | 1 = DTMF |